


FF CP100 Series Conventional Alarm Call Points

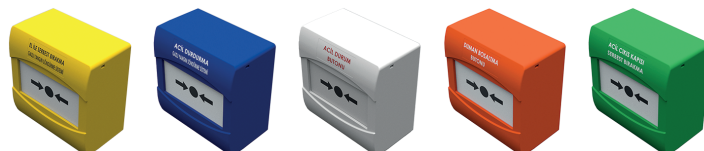

Dedal  **EN54-11**

FEATURES

- ▶ Resettable operating element
- ▶ Unique 'Plug & Play' installation concept
- ▶ Suitable for all types of conventional fire alarm systems
- ▶ Enhanced aesthetics
- ▶ Ergonomic reset key
- ▶ CPR certified

TECHNICAL SPECIFICATIONS

Operating Type	Type A Manual
Contact Type	NC/NO/470R
Usage Area	Surface mounted, indoor
Operating Voltage	5-30V DC
Alarm Current	10mA for LED model
Weight	170 g
Dimensions	85x85x48 mm
Body Material	ABS
Operating Temperature	-10°C ~ +60°C
Humidity	≤93% RH (at +40°C)
IP Rating	IP30

ORDER DETAILS

- ▶ FF CP100 — Conventional Fire Alarm Call Point
- ▶ FF CP100 Y — Conventional Release Call Point
- ▶ FF CP100 B — Conventional Abort Call Point
- ▶ FF CP100 W — Conventional Emergency Call Point
- ▶ FF CP100 O — Conventional Smoke Vent Call Point
- ▶ FF CP100 G — Conventional Access Call Point

FND-DS-FFCP100-EN-REV00